


'FE' flat glass aluminium framed rooflights – standard sizes:

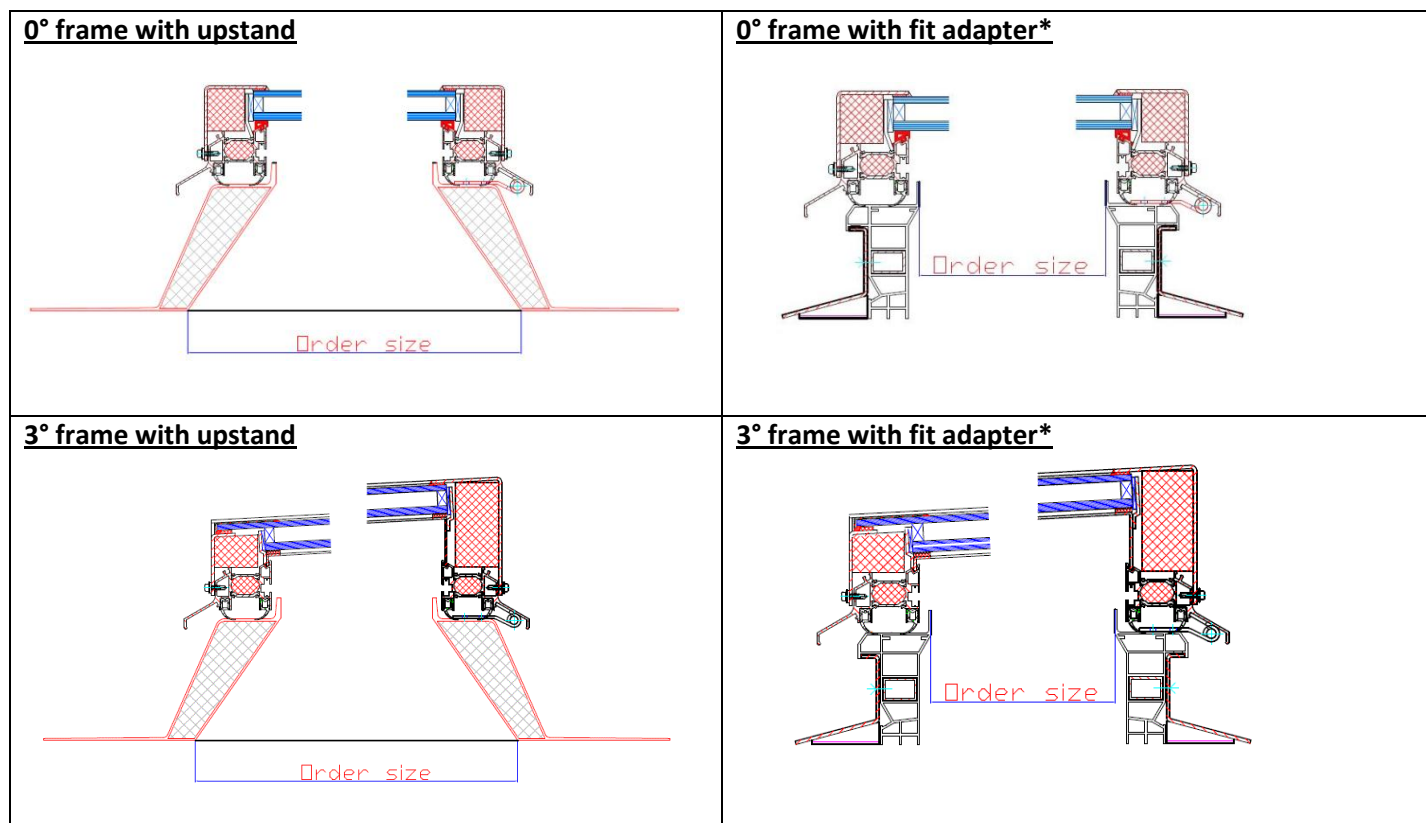

* = Fit adapters are used to install our rooflight onto an existing/builder supplied upstand, our "Fit adapter No.8" is shown – many other adapters are available.

Order size (cm's)	0° frame with upstand	0° frame with fit adapter	3° frame with upstand	3° frame with fit adapter
60 x 60	•	•	•	•
60 x 90	•	•	•	•
60 x 120	•	•	•	•
70 x 135	•	•	•	•
80 x 80	•	•	•	•
80 x 150	•	•	•	•
90 x 90	•	•	•	•
90 x 120	•	•	•	•
90 x 145	•	•	•	•
100 x 100	•	•	•	•
100 x 150	•	•	•	•
100 x 200	•	•	•	•
120 x 120	•	•	•	•
120 x 150	•	•	•	•
120 x 180	•	•	•	•
125 x 125	•	•	•	•
150 x 150	•	•	•	•
150 x 180	•	•	•	•
150 x 200	•	•	•	•
180 x 180	•	•	•	•
200 x 200	•	•	•	•

Notes:

- **12 working day's delivery**, mill finish or RAL 9006 frames only.
- All other standard sizes 4 weeks, from order, including:
 - Clear and obscured glazing options.
 - Double glazed ($U_g = 1.1W/m^2K$) & triple glazed ($U_g = 0.6W/m^2K$).
 - Frames in any standard RAL colour, or mill finish.
- **6-8 weeks delivery**, for these sizes and for special glass specifications/options.
- Custom sizes available, by request.
- All FE rooflights are pre-fitted for ventilation and can therefore be optionally supplied as a manually or electrically hinged opening rooflight.
- Available insulated GRP upstand heights: 15, 30, 40, 50cm's (fast moving items with 30cm high upstand).